




## Hygienic Solutions at Work

## **Recessed Hands Free Roll Towel Dispenser**

**<u>Code 135A-70:</u>** Stainless type 304, fully recessed Code 135B-70: Stainless type 304, semi recessed Code 135C-70: Stainless type 304, surface mounted

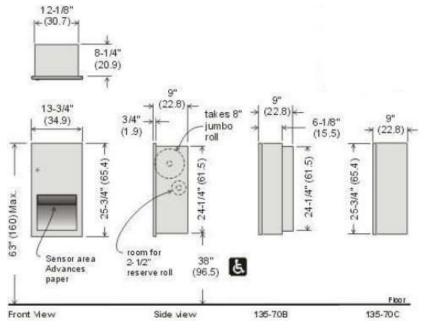



## **Specifications:**

Site location: Extra deep fixture is ideal for high traffic areas.

**Dispensing:** Universal towel dispenser will accept all standard 8" wide roll towels. Large detection zone senses hand when placed in a natural position under dispenser to deliver a 12" length of towel. Towel delivery is quiet and uniform. Hands free dispenser reduces paper flow, and provides maximum hygiene. Operates with 4 "D" size alkaline batteries or plug in AC adaptor. 4 alkaline batteries have be independently tested and found to provide 35,000 hand dries.

**Door:** Heavy duty 18 gauge stainless steel door (304, # 4 brushed finish). Secured with tumbler keyed lock.

Hinges: Door is hinged with full length stainless steel piano hinge.

Recessed Body: Corrosion resistant galvanized steel (20 ga.).

**Installation:** Provide 24-5/8" (62.5) high x 12-1/2" (31.7) wide x 8-1/2" (21.5) deep wall opening. Drill mounting holes as required. For unrestricted access, height of top of unit to floor must not exceed 63" (160cm) (or bottom of rough opening 38" (96.5cm) from floor), this results in the sensor area being 47" (119.3 cm) or less from floor.

Description and specifications applicable on date issued. Frost reserves the right to make improvements or changes without notice.